


DESCRIPTION

The Belar AMDA-1 is a wideband loss-less active AM RF SPLITTER for distributing the AM signal from a single LP-1A active loop antenna to up to twelve receivers.

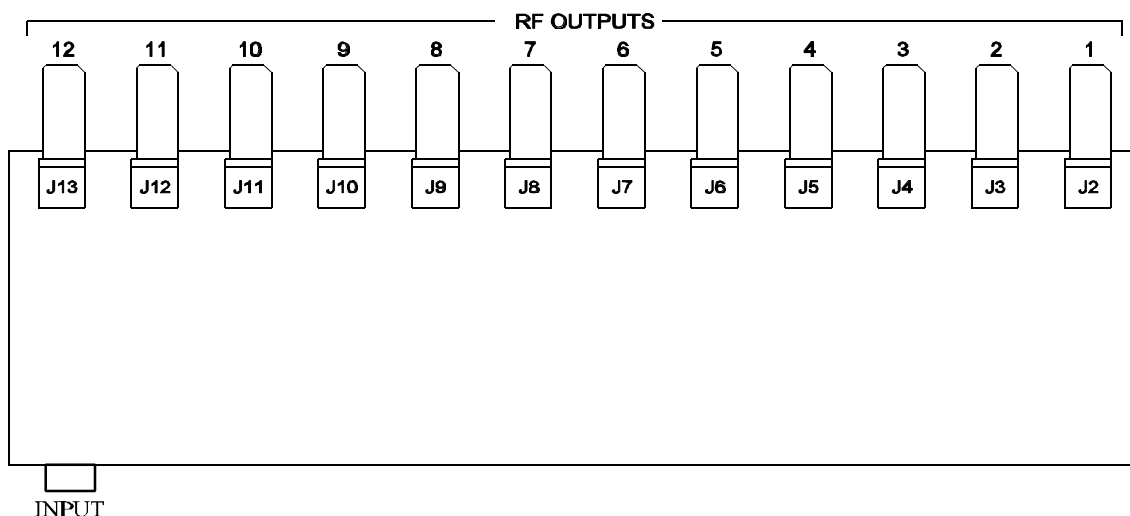

SPECIFICATIONS

Input 50 Ω BNC
 Phantom Power Fused +12 VDC

Outputs (12) 75 Ω f connectors
 Frequency Response 0.4 to 5 Mhz ± 0.5 db

Power Consumption 10 watts, 100–240 V, 50–60 Hz
 Dimensions 1 3/4"H x 19"W x 8" D (EIA rack mount)
 Shipping Weight 8 lbs. (3.8 kg)

Specifications are subject to change without prior notice.

All Belar products are Y2K compliant.



BELAR ELECTRONICS LABORATORY, INC.
 119 LANCASTER AVENUE ! P.O. BOX 76
 DEVON, PA 19333-0076 USA ! VOICE (610) 687-5550 ! FAX (610) 687-2686
 WEB: <http://www.belar.com/> ! E-mail: sales@belar.com

Where Accuracy Counts . . . Count on Belar

Manufactured in the U.S.A.