


DESCRIPTION

The Belar AMDA-1 is a wideband loss-less active AM RF SPLITTER for distributing the AM signal from a single LP-1A active loop antenna to up to twelve receivers.

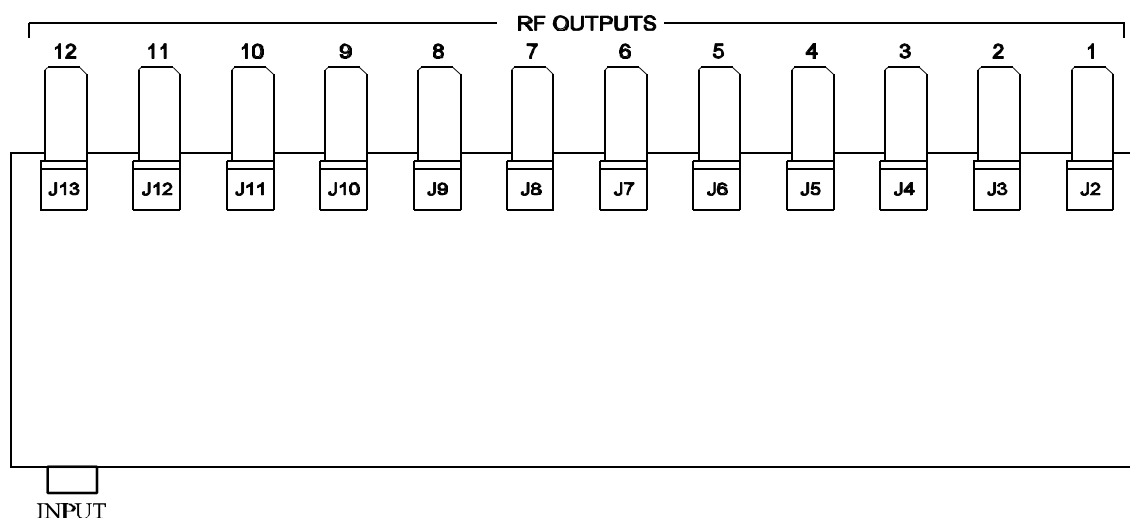

SPECIFICATIONS

Input	50 Ω BNC
Phantom Power Fused	+12 VDC
Outputs	(12) 75 Ω f connectors
Frequency Response	0.4 to 5 Mhz $\pm$ 0.5 db
Power Consumption	10 watts, 100–240 V, 50–60 Hz
Dimensions	1 3/4"H $\times$ 19"W $\times$ 8" D (EIA rack mount)
Shipping Weight	8 lbs. (3.8 kg)

Specifications are subject to change without prior notice.



BELAR ELECTRONICS LABORATORY, INC.

119 LANCASTER AVENUE ! P.O. BOX 76

DEVON, PA 19333-0076 USA ! VOICE (610) 687-5550 ! FAX (610) 687-2686

WEB: <http://www.belar.com/> ! E-mail: sales@belar.com

Where Accuracy Counts . . . Count on Belar

Manufactured in the U.S.A.